

# TECHNICAL DATASHEET



## FLANGE ADAPTOR

03 Update - 06/2022


### TECHNICAL DATA

|                       |                   |
|-----------------------|-------------------|
| Article No            | 001 115 5100 1000 |
| d<br>(mm)             | 1000              |
| d1<br>(mm)            | 1050              |
| d2<br>(mm)            | 1112              |
| d3<br>(mm)            | 972               |
| le<br>(mm)            | 379               |
| L<br>(mm)             | 65                |
| Z<br>(mm)             | 557               |
| s<br>(mm)             | 59,3              |
| Weight<br>(Kg)        | 100,500           |
| Box Quantity<br>(pcs) | 1                 |
| Box Dimension<br>(cm) |                   |

### IDENTIFICATION OF PRODUCT

|                |                                 |
|----------------|---------------------------------|
| D(mm)          | 1000                            |
| SDR            | 17                              |
| RAW METARIAL   | PE 100                          |
| PRESSURE CLASS | 10 Bar Water                    |
| TRADEMARK      | NTG                             |
| EXECUTION      | Injection Moulded+Pipe Extended |
| STANDARD       | EN 12201-3                      |

### INJECTION MOULDED

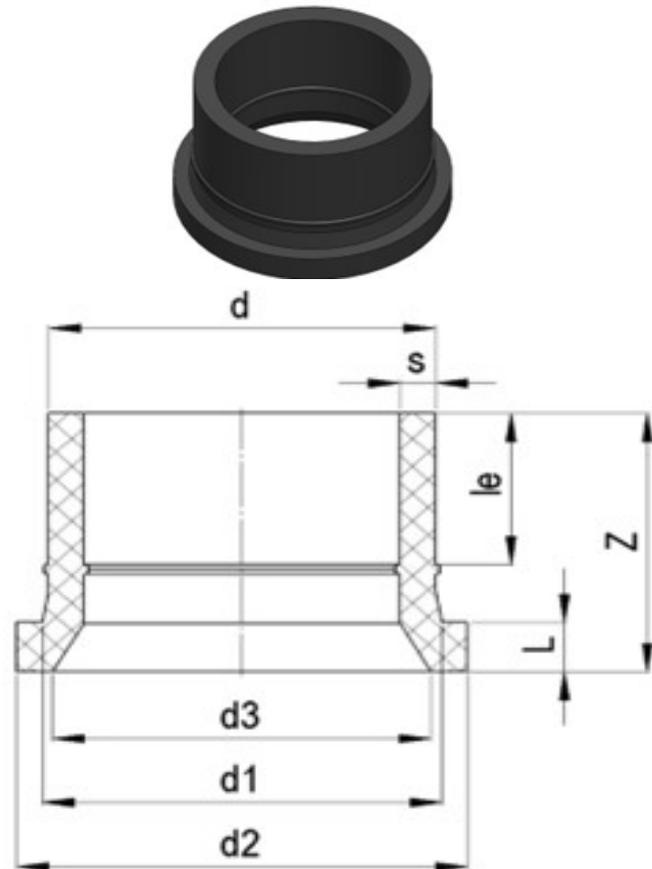

### SPECIFICATION

Long Spigot  
Suitable for butterfly valve  
Chamfered finish, where d3 size is given  
Extended with PE100 Pipe  
Not suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00