

TECHNICAL DATASHEET




EF TAPPING SADDLE

04 Update - 01/2023

TECHNICAL DATA

Article No	001 117 2071 0190
d (mm)	180
d1 (mm)	32
le (mm)	76
h (mm)	250
h1 (mm)	115
Z (mm)	143
L (mm)	140
Weight (Kg)	1,000
Box Quantity (pcs)	5
Box Dimension (cm)	55x30x36

INJECTION MOULDED

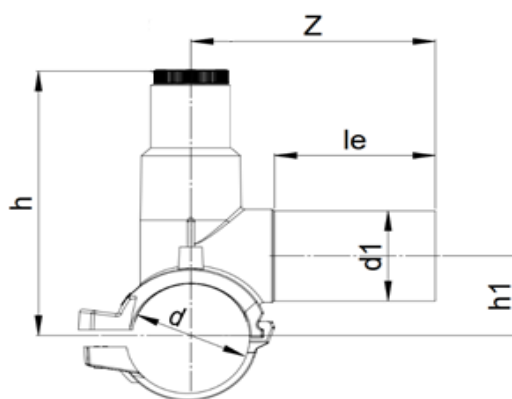

IDENTIFICATION OF PRODUCT

D(mm)	180-32
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3
	EN 1555-3
	AS / NZS 4129

SPECIFICATION	Suitable for SDR11.....17 pipe
	Injected monobloc type
	4 mm pin connectors
	Long Fusion outlet
	Hexagon wrench 12 mm
	O-ring sealed screw cap

EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	7,0 Ω
WELDING TIME	130 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



941420323743407005130116

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.