

# TECHNICAL DATASHEET




## EF TAPPING SADDLE

04 Update - 01/2023

### TECHNICAL DATA

Article No	001 117 2071 0236
d (mm)	225
d1 (mm)	40
le (mm)	83
h (mm)	281
h1 (mm)	137
Z (mm)	165
L (mm)	140
Weight (Kg)	1,140
Box Quantity (pcs)	4
Box Dimension (cm)	55x30x36

### INJECTION MOULDED

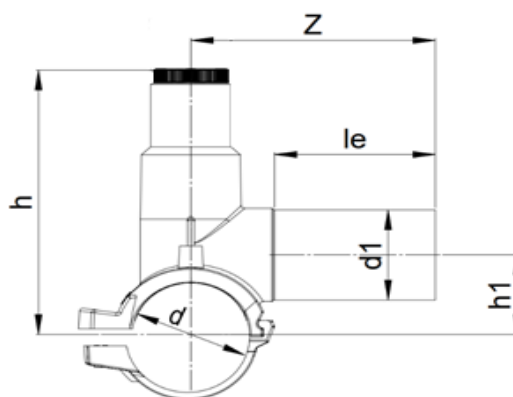

### IDENTIFICATION OF PRODUCT

D(mm)	225-40
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3
	EN 1555-3
	AS / NZS 4129

### SPECIFICATION

Suitable for SDR11.....17 pipe  
 Injected monobloc type  
 4 mm pin connectors  
 Long Fusion outlet  
 Hexagon wrench 12 mm  
 O-ring sealed screw cap

### EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	7,0 $\Omega$
WELDING TIME	130 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



941420324373407005130118

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.