

TECHNICAL DATASHEET




EF REDUCER

03 Update - 06/2023

TECHNICAL DATA

Article No	101 117 2080 0033
d1 (mm)	32
d2 (mm)	25
D1 (mm)	43
D2 (mm)	34
le1 (mm)	38,5
le2 (mm)	36,5
Z (mm)	77
m1 (mm)	20,2
m2 (mm)	19,5
Weight (Kg)	0,056
Box Quantity (pcs)	75
Box Dimension (cm)	29x48x20

INJECTION MOULDED

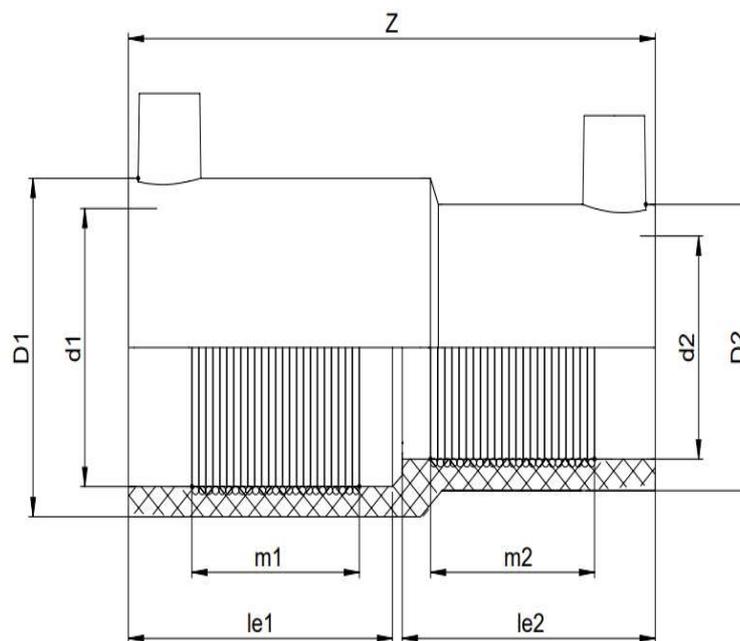

IDENTIFICATION OF PRODUCT

D(mm)	32-25
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	5.86 Ω
WELDING TIME	30 Sec
COOLING TIME	5 Min
WINDING TYPE	Monofilar
WELDING BARCODE	



931420300633995865030111

SPECIFICATION	Suitable for SDR9...11 pipe 4 mm pin connectors
---------------	----------------------------------------------------

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.