

FLANGE ADAPTOR

03 Update - 06/2022


TECHNICAL DATA

Article No	001 117 5103 0560
d (mm)	560
d1 (mm)	580
d2 (mm)	654
d3 (mm)	549
le (mm)	248
L (mm)	80
Z (mm)	423
s (mm)	50,9
Weight (Kg)	38,400
Box Quantity (pcs)	1
Box Dimension (pcs)	

IDENTIFICATION OF PRODUCT

D(mm)	560
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded+Pipe Extended
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

INJECTION MOULDED

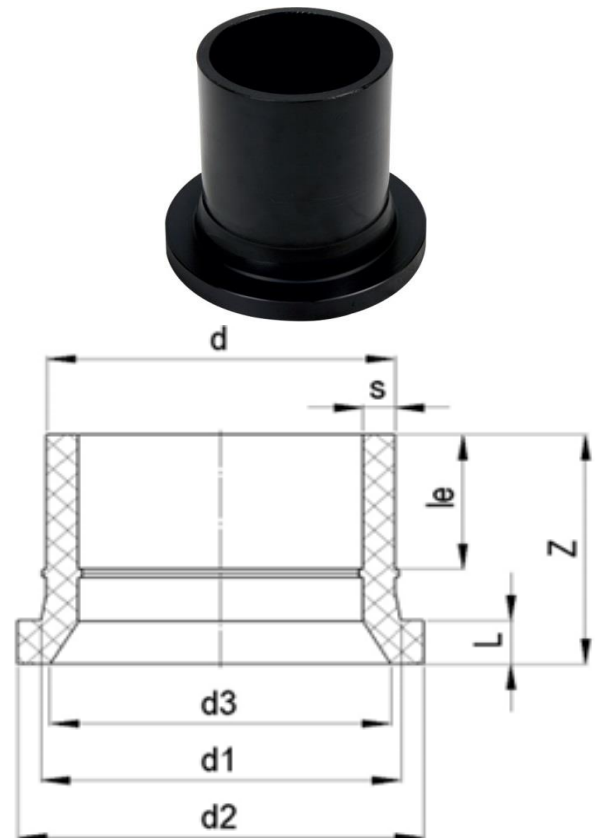

SPECIFICATION

- Long Spigot
- Suitable for butterfly valve
- Suitable for ansi flange
- Chamfered finish, where d3 size is given
- Extended with PE100 Pipe
- Needed spacer for butterfly valve

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.