


FLANGE ADAPTOR

03 Update - 06/2022

TECHNICAL DATA

Article No	001 117 5100 0560
d (mm)	560
d1 (mm)	618
d2 (mm)	690
d3 (mm)	580
le (mm)	248
L (mm)	80
Z (mm)	423
s (mm)	50,8
Weight (Kg)	40,150
Box Quantity (pcs)	1
Box Dimension (cm)	

INJECTION MOULDED

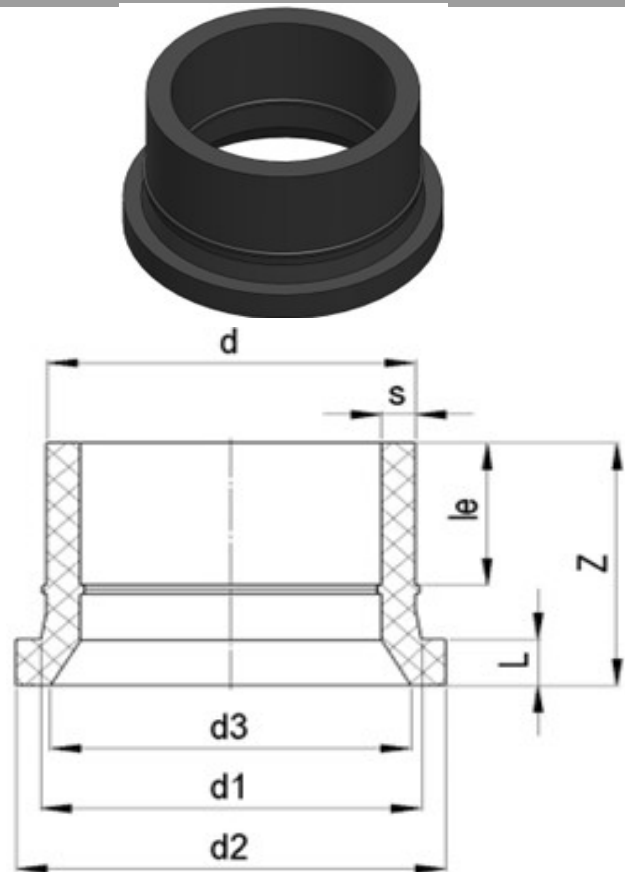

IDENTIFICATION OF PRODUCT

D(mm)	560
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water
TRADEMARK	NTG
EXECUTION	Injection Moulded+Pipe Extended
STANDARD	EN 12201-3

SPECIFICATION

Long Spigot
 Suitable for butterfly valve
 Chamfered finish, where d3 size is given
 Not suitable for ansi flange
 Extended with PE100 Pipe
 Spacer needed for butterfly valve

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.