

TECHNICAL DATASHEET




EF TAPPING SADDLE

04 Update - 01/2023

TECHNICAL DATA

| | |
|-----------------------|-------------------|
| Article No | 001 117 2071 0078 |
| d (mm) | 75 |
| d1 (mm) | 40 |
| le (mm) | 82 |
| h (mm) | 186 |
| h1 (mm) | 56 |
| Z (mm) | 126 |
| L (mm) | 120 |
| Weight (Kg) | 0,624 |
| Box Quantity (pcs) | 15 |
| Box Dimension (cm) | 55x30x36 |

INJECTION MOULDED

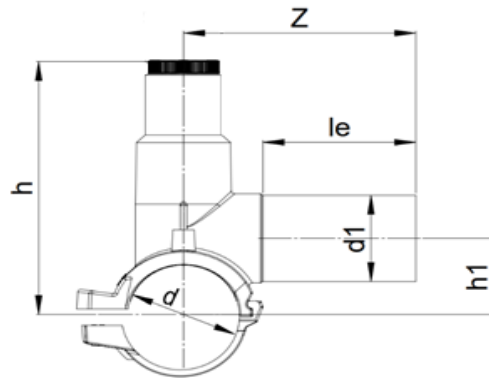

IDENTIFICATION OF PRODUCT

| | |
|----------------|-------------------------|
| D(mm) | 75-40 |
| SDR | 11 |
| RAW MATERIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 |

SPECIFICATION

EN 1555-3
AS / NZS 4129
Suitable for SDR11....17 pipe
Injected monobloc type
4 mm pin connectors
Long Fusion outlet
Hexagon wrench 17 mm
O-ring sealed screw cap

EF SPECIFICATION

| | |
|-----------------|--------------|
| WELDING VOLTAGE | 40 V |
| RESISTANCE | 7,3 Ω |
| WELDING TIME | 75 Sec. |
| COOLING TIME | 15 Min. |
| WINDING TYPE | Monofilar |
| WELDING BARCODE | |



941420321893407305075117

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00