

# TECHNICAL DATASHEET




## EF COUPLER

04 Update - 04/2024

### TECHNICAL DATA

Article No	001 117 2160 0110
d (mm)	110
D (mm)	137
Z (mm)	144
m (mm)	36,80
Weight (Kg)	0,680
Box Quantity (pcs)	30
Box Dimension (cm)	36x60x46,5

### INJECTION MOULDED

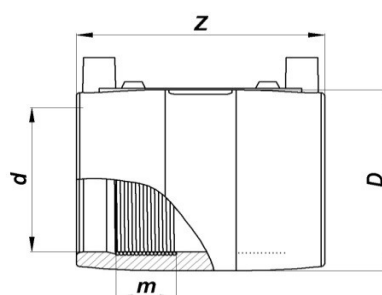

### IDENTIFICATION OF PRODUCT

D(mm)	110
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

### EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	0.95 $\Omega$
WELDING TIME	150 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



951420321103400956150113

SPECIFICATION	Suitable for SDR9...17 pipe Removable center stopper ( up to 400 mm ) 4 mm pin connectors
---------------	---

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00