

TECHNICAL DATASHEET




EF REDUCER

03 Update - 06/2023

TECHNICAL DATA

Article No	001 117 2080 0127
d1 (mm)	125
d2 (mm)	90
D1 (mm)	155
D2 (mm)	116
le1 (mm)	85
le2 (mm)	67
Z (mm)	160
m1 (mm)	52,5
m2 (mm)	35
Weight (Kg)	0,912
Box Quantity (pcs)	12
Box Dimension (cm)	55x30x37,5

INJECTION MOULDED

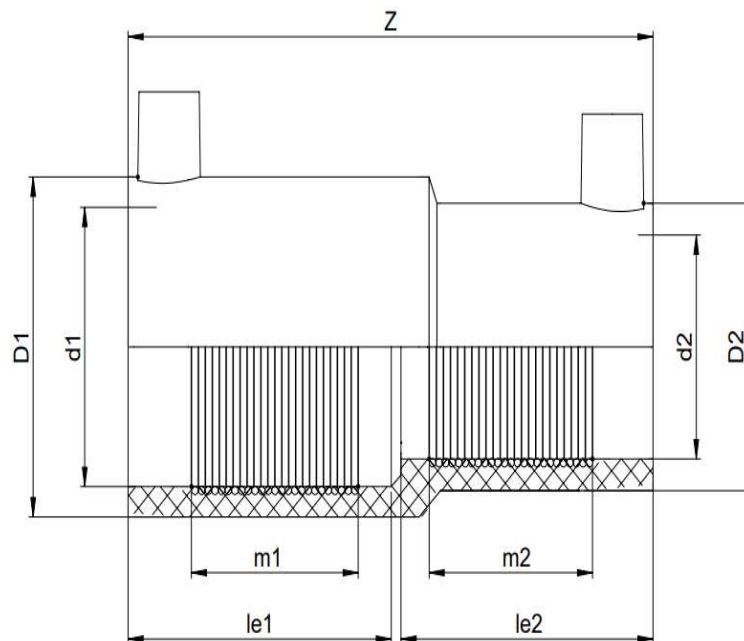

IDENTIFICATION OF PRODUCT

D(mm)	125-90
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	1.10 Ω
WELDING TIME	250 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar

WELDING BARCODE



931420322863401106250114

SPECIFICATION	Suitable for SDR11....17 pipe 4 mm pin connectors
---------------	--

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.