

TECHNICAL DATASHEET




STEP REDUCER

01 Update - 12/2018

TECHNICAL DATA

Article No	01 115 1081 0228		
D1 (mm)	160	S1 (mm)	9.5
D2 (mm)	180	S2 (mm)	10.7
D3 (mm)	200	S3 (mm)	11.9
D4 (mm)	225	S4 (mm)	13.4
L1 (mm)	36	Z (mm)	171
L2 (mm)	36	Weight (Kg)	1.3
L3 (mm)	36	Box Quantity (pcs)	1
L4 (mm)	36	Box Dimension (pcs)	

INJECTION MOULDED

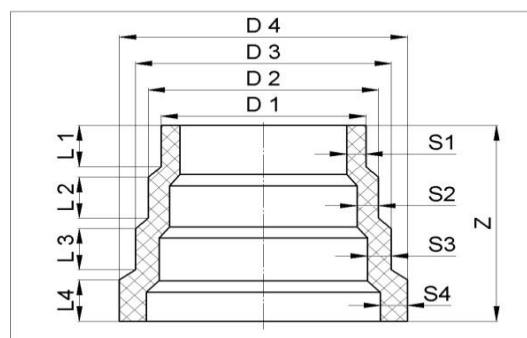

IDENTIFICATION OF PRODUCT

D(mm)	225-160
SDR	17
RAW METARIAL	PE 100
PRESSURE CLASS	10 Bar Water
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Special Equipment Required

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00