

TECHNICAL DATASHEET




EF REDUCER

03 Update - 06/2023

TECHNICAL DATA

Article No	101 117 2080 0026
d1 (mm)	25
d2 (mm)	20
D1 (mm)	34
D2 (mm)	29
le1 (mm)	38,5
le2 (mm)	36,5
Z (mm)	77
m1 (mm)	20,35
m2 (mm)	18,9
Weight (Kg)	0,041
Box Quantity (pcs)	75
Box Dimension (cm)	29x48x20

INJECTION MOULDED

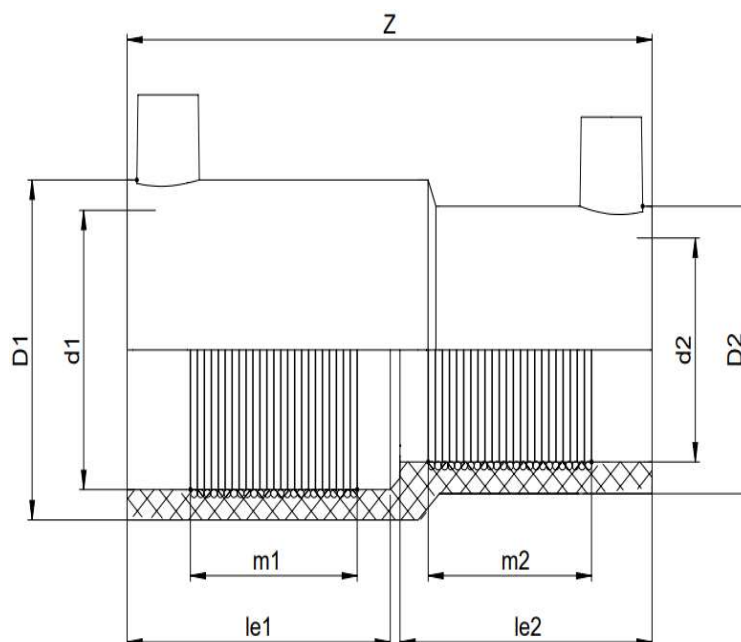

IDENTIFICATION OF PRODUCT

D(mm)	25-20
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	9.19 Ω
WELDING TIME	35 Sec.
COOLING TIME	3 Min.
WINDING TYPE	Monofilar

WELDING BARCODE



931420300313999195035111

SPECIFICATION	Suitable for SDR9...11 pipe 4 mm pin connectors
---------------	--

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.