

TECHNICAL DATASHEET




EF COUPLER

04 Update - 04/2024

TECHNICAL DATA

Article No	001 115 2160 0315
d (mm)	315
D (mm)	364
Z (mm)	264
m (mm)	56
Weight (Kg)	6,440
Box Quantity (pcs)	1
Box Dimension (cm)	40x40x29,5

INJECTION MOULDED

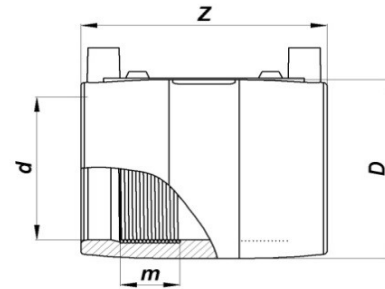

IDENTIFICATION OF PRODUCT

D(mm)	315
SDR	17
RAW MATERIAL	PE 100
PRESSURE CLASS	10 Bar Water 6 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129
SPECIFICATION	Suitable for SDR17...26 pipe 4 mm pin connectors

EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	0.75 Ω
WELDING TIME	850 Sec.
COOLING TIME	30 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



951420343153400756850111

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance \pm 5%. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.