

TECHNICAL DATASHEET




EF COUPLER

04 Update - 04/2024

TECHNICAL DATA

Article No	001 117 2160 0032
d (mm)	32
D (mm)	44
Z (mm)	85
m (mm)	17,6
Weight (Kg)	0,055
Box Quantity (pcs)	75
Box Dimension (cm)	35,5x35,5x27,5

INJECTION MOULDED

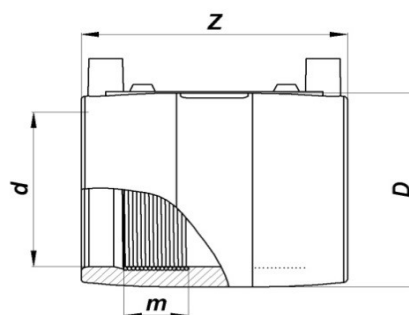

IDENTIFICATION OF PRODUCT

d(mm)	32
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

EF SPECIFICATION

WELDING VOLTAGE	40 V
RESISTANCE	5,25 Ω
WELDING TIME	45 Sec.
COOLING TIME	10 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



951420310323405254045112

SPECIFICATION	Suitable for SDR9...11 pipe Removable center stopper (up to 400 mm) 4 mm pin connectors
---------------	---

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.