

TECHNICAL DATASHEET




EF REDUCER

03 Update - 01/2025

TECHNICAL DATA

Article No	001 117 2080 0033
d1 (mm)	32
d2 (mm)	25
D1 (mm)	45
D2 (mm)	37
le1 (mm)	48
le2 (mm)	33
Z (mm)	85
m1 (mm)	26,3
m2 (mm)	14,7
Weight (Kg)	0,067
Box Quantity (pcs)	75
Box Dimension (cm)	35,5x35,5x27,5

INJECTION MOULDED

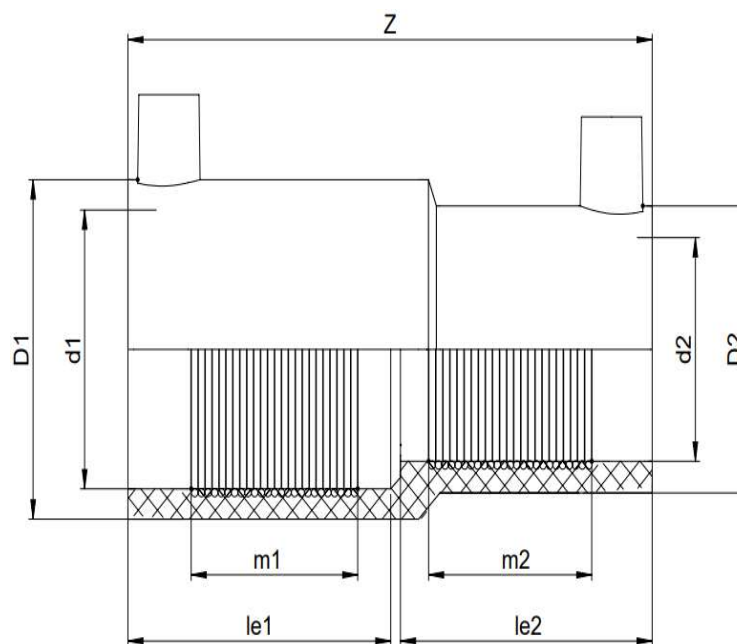

IDENTIFICATION OF PRODUCT

D(mm)	32-25
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	4,10 Ω
WELDING TIME	30 Sec
COOLING TIME	5 Min
WINDING TYPE	Monofilar
WELDING BARCODE	



931420300633404104030114

SPECIFICATION	Suitable for SDR9...11 pipe 4 mm pin connectors
---------------	--

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.