


FLANGE ADAPTOR

03 Update - 04/2024

TECHNICAL DATA

Article No	001 115 1100 0400
d (mm)	400
d1 (mm)	430
d2 (mm)	485
d3 (mm)	396
le (mm)	52
L (mm)	33
Z (mm)	120
s (mm)	23,7
Weight (Kg)	4,890
Box Quantity (pcs)	2
Box Dimension (pcs)	55x30x50

INJECTION MOULDED

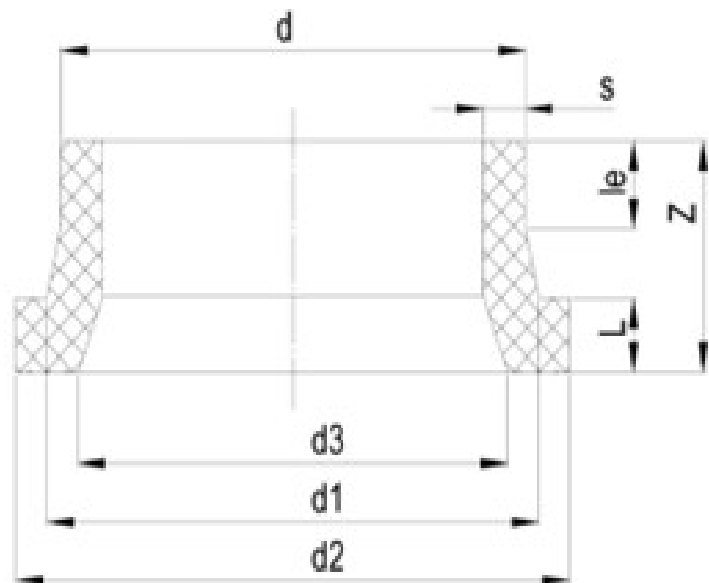

IDENTIFICATION OF PRODUCT

D(mm)	400
SDR	17
RAW METARIAL	PE 100
PRESSURE CLASS	10 Bar Water 6 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Suitable for butterfly valve
Suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.