

TECHNICAL DATASHEET




FLANGE ADAPTOR

03 Update - 07/2022

TECHNICAL DATA

Article No	001 115 1100 0500
d (mm)	500
d1 (mm)	530
d2 (mm)	590
d3 (mm)	497
le (mm)	45
L (mm)	46
Z (mm)	120
s (mm)	29,7
Weight (Kg)	7,835
Box Quantity (pcs)	1
Box Dimension (pcs)	

INJECTION MOULDED

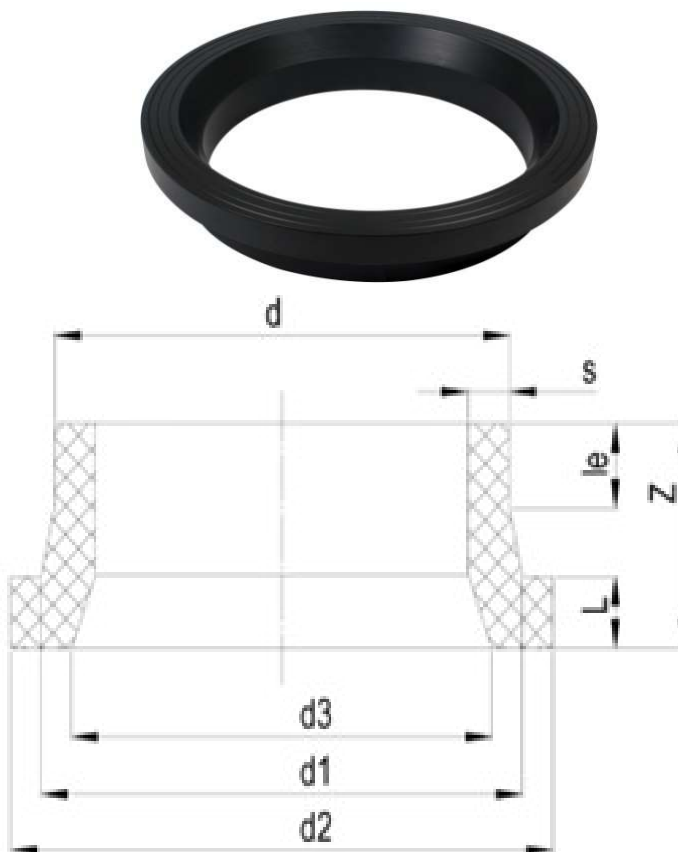

IDENTIFICATION OF PRODUCT

D(mm)	500
SDR	17
RAW METARIAL	PE 100
PRESSURE CLASS	10 Bar Water 5 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Suitable for butterfly valve
Suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00