


## FLANGE ADAPTOR

03 Update - 07/2022

### TECHNICAL DATA

Article No	001 117 1103 0560
d (mm)	560
d1 (mm)	580
d2 (mm)	654
d3 (mm)	549
le (mm)	43
L (mm)	80
Z (mm)	180
s (mm)	50,9
Weight (Kg)	19,200
Box Quantity (pcs)	1
Box Dimension (pcs)	

### INJECTION MOULDED

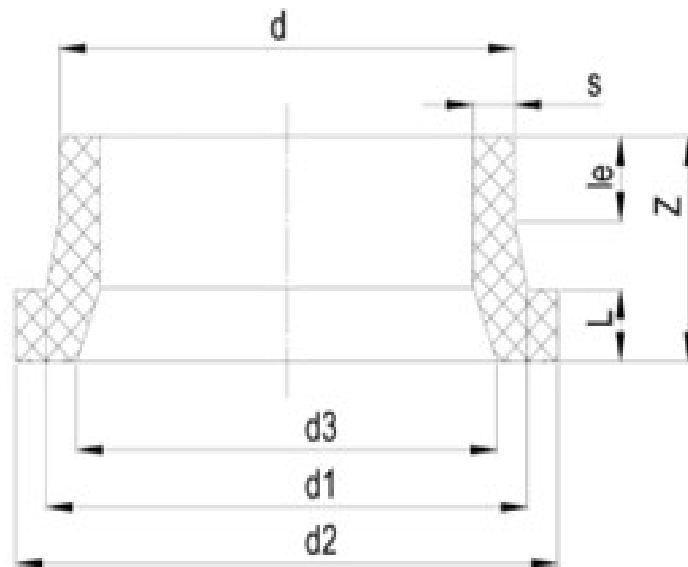

### IDENTIFICATION OF PRODUCT

D(mm)	560
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

### SPECIFICATION

- Short Spigot
- Suitable for butterfly valve
- Chamfered finish, where d3 size is given
- Suitable for ansi flange
- Spacer needed for butterfly valve

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.