


FLANGE ADAPTOR

03 Update - 05/2024

TECHNICAL DATA

Article No	001 117 1100 0560
d (mm)	560
d1 (mm)	618
d2 (mm)	690
d3 (mm)	580
le (mm)	43
L (mm)	80
Z (mm)	180
s (mm)	50,8
Weight (Kg)	20,565
Box Quantity (pcs)	1
Box Dimension (pcs)	

INJECTION MOULDED

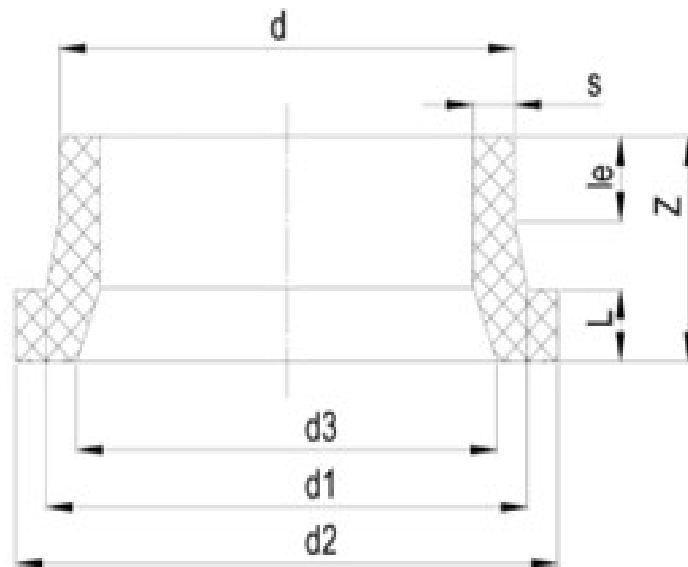

IDENTIFICATION OF PRODUCT

D(mm)	560
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

- Short Spigot
- Suitable for butterfly valve
- Chamfered finish, where d3 size is given
- Not suitable for ansi flange
- Spacer needed for butterfly valve

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.