


## FLANGE ADAPTOR

03 Update - 06/2022

### TECHNICAL DATA

|                       |                   |
|-----------------------|-------------------|
| Article No            | 001 117 5100 0630 |
| d<br>(mm)             | 630               |
| d1<br>(mm)            | 645               |
| d2<br>(mm)            | 690               |
| d3<br>(mm)            | 576               |
| le<br>(mm)            | 274               |
| L<br>(mm)             | 65                |
| Z<br>(mm)             | 404               |
| s<br>(mm)             | 57,3              |
| Weight<br>(Kg)        | 43,300            |
| Box Quantity<br>(pcs) | 1                 |
| Box Dimension<br>(cm) |                   |

### INJECTION MOULDED

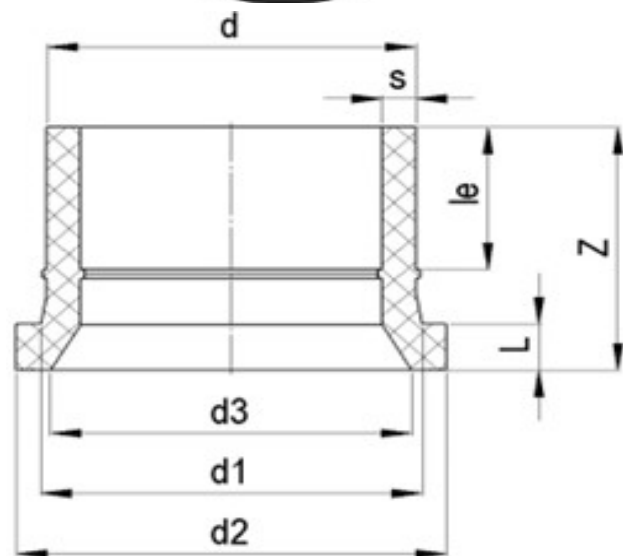

### IDENTIFICATION OF PRODUCT

|                |                                 |
|----------------|---------------------------------|
| D(mm)          | 630                             |
| SDR            | 11                              |
| RAW METARIAL   | PE 100                          |
| PRESSURE CLASS | 16 Bar Water                    |
| TRADEMARK      | NTG                             |
| EXECUTION      | Injection Moulded+Pipe Extended |
| STANDARD       | EN 12201-3                      |

### SPECIFICATION

Long Spigot  
 Suitable for butterfly valve  
 Chamfered finish, where d3 size is given  
 Not suitable for ansi flange  
 Extended with PE100 Pipe

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.