

TECHNICAL DATASHEET




FLANGE ADAPTOR

03 Update - 07/2022

TECHNICAL DATA

Article No	001 117 1103 0630
d (mm)	630
d1 (mm)	650
d2 (mm)	710
d3 (mm)	576
le (mm)	45
L (mm)	65
Z (mm)	140
s (mm)	57,3
Weight (Kg)	17,500
Box Quantity (pcs)	1
Box Dimension (pcs)	

INJECTION MOULDED

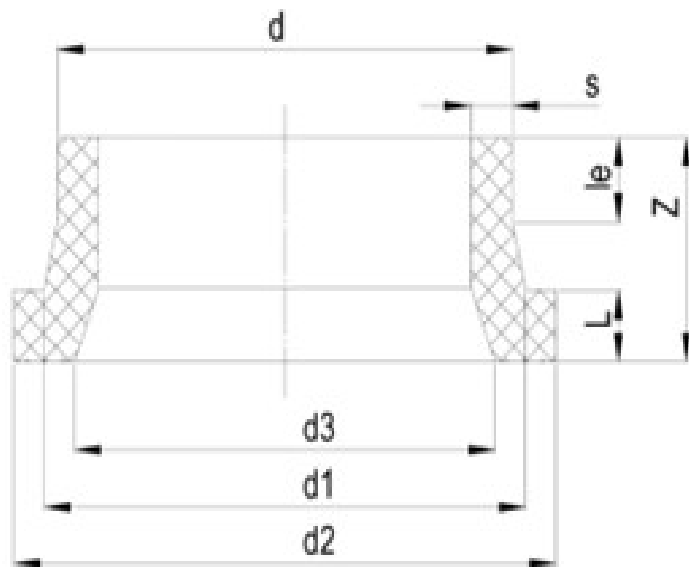

IDENTIFICATION OF PRODUCT

D(mm)	630
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

SPECIFICATION

Short Spigot
Suitable for butterfly valve
Chamfered finish, where d3 size is given
Suitable for ansi flange

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00