


## EF REDUCER

03 Update - 06/2023

### TECHNICAL DATA

Article No	001 117 2080 0113
d1 (mm)	110
d2 (mm)	63
D1 (mm)	139
D2 (mm)	83
le1 (mm)	71
le2 (mm)	56
Z (mm)	157
m1 (mm)	30,8
m2 (mm)	22
Weight (Kg)	0,642
Box Quantity (pcs)	24
Box Dimension (cm)	55x30x50

### INJECTION MOULDED

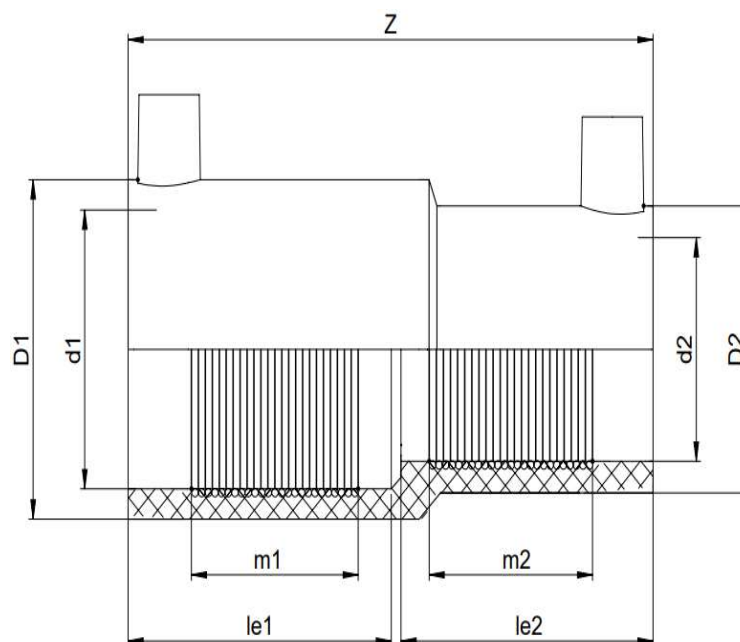

### IDENTIFICATION OF PRODUCT

D(mm)	110-63
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129

### EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	0.97Ω
WELDING TIME	90 Sec.
COOLING TIME	15 Min.
WINDING TYPE	Monofilar

### WELDING BARCODE



931420322533400976090112

SPECIFICATION	Suitable for SDR11....17 pipe 4 mm pin connectors
---------------	--

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.