

TECHNICAL DATASHEET




EF REDUCED TEE 90°

04 Update - 03/2023

TECHNICAL DATA

Article No	001 117 2042 0183
d1 (mm)	180
d2 (mm)	125
D (mm)	228
Z (mm)	340
L (mm)	207
le1 (mm)	88
le2 (mm)	92
m (mm)	43,5
Weight (Kg)	5,650
Box Quantity (pcs)	2
Box Dimension (cm)	55x30x37,5

INJECTION MOULDED

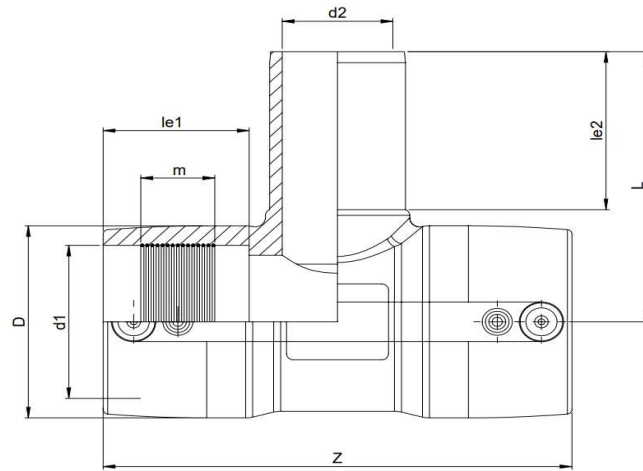

IDENTIFICATION OF PRODUCT

D(mm)	180-125
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129
SPECIFICATION	Suitable for SDR9...17 pipe 4 mm pin connectors

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	0,90 Ω
WELDING TIME	530 Sec.
COOLING TIME	20 Min.
WINDING TYPE	Monofilar
WELDING BARCODE	



971420331803400906530118

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.