

# TECHNICAL DATASHEET




## STEP REDUCER

01 Update - 12/2018

### TECHNICAL DATA

Article No	001 117 1081 0228		
D1 (mm)	160	S1 (mm)	14.6
D2 (mm)	180	S2 (mm)	16.4
D3 (mm)	200	S3 (mm)	18.2
D4 (mm)	225	S4 (mm)	20.5
L1 (mm)	36	Z (mm)	171
L2 (mm)	36	Weight (Kg)	1.7
L3 (mm)	36	Box Quantity (pcs)	1
L4 (mm)	36	Box Dimension (pcs)	

### INJECTION MOULDED

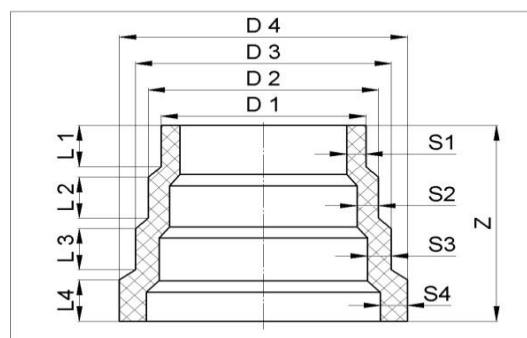

### IDENTIFICATION OF PRODUCT

D(mm)	225-160
SDR	11
RAW METARIAL	PE 100
PRESSURE CLASS	16 Bar Water
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS /NZS 4129

### SPECIFICATION

Short Spigot  
Special Equipment Required

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance  $\pm 5\%$ . NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.

Fr 161 Rev 00